


Pneumatic Rubber Fender Ø2,0m x 3,5m L

Features:

- High energy absorption with a low reaction force
- Adjust performance by varying internal pressure
- Low maintenance
- Suitable for areas with tidal difference
- Chain and tyre protection net for heavy duty use
- Chain, shackles and swivel joints are Q235
- Manufactured in accordance with ISO17357:2014

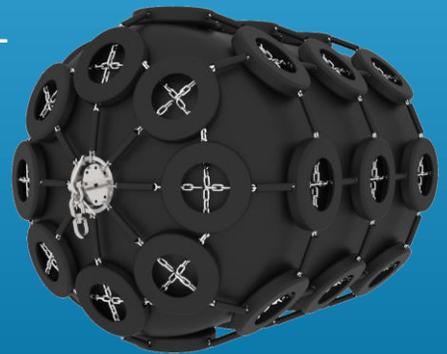

Pneumatic Fender Ø2,0m x 3,5m L

Out diameter(without tire)	: 2000 mm
Length	: 3500 mm
Initial internal pressure	: 50 kpa
Testpressure	: 200 kPa
Hull pressure at GEA deflection	: 128kPa
Energyabsorption (at 60% deflection)	: 308 kN-M
Reactionforce (at 60% deflection)	: 875 kN
Wall thickness	: 12 mm
Weight	: 1010 kg
Warranty	: 12 months
Certification	: ISO17357